



Dimension

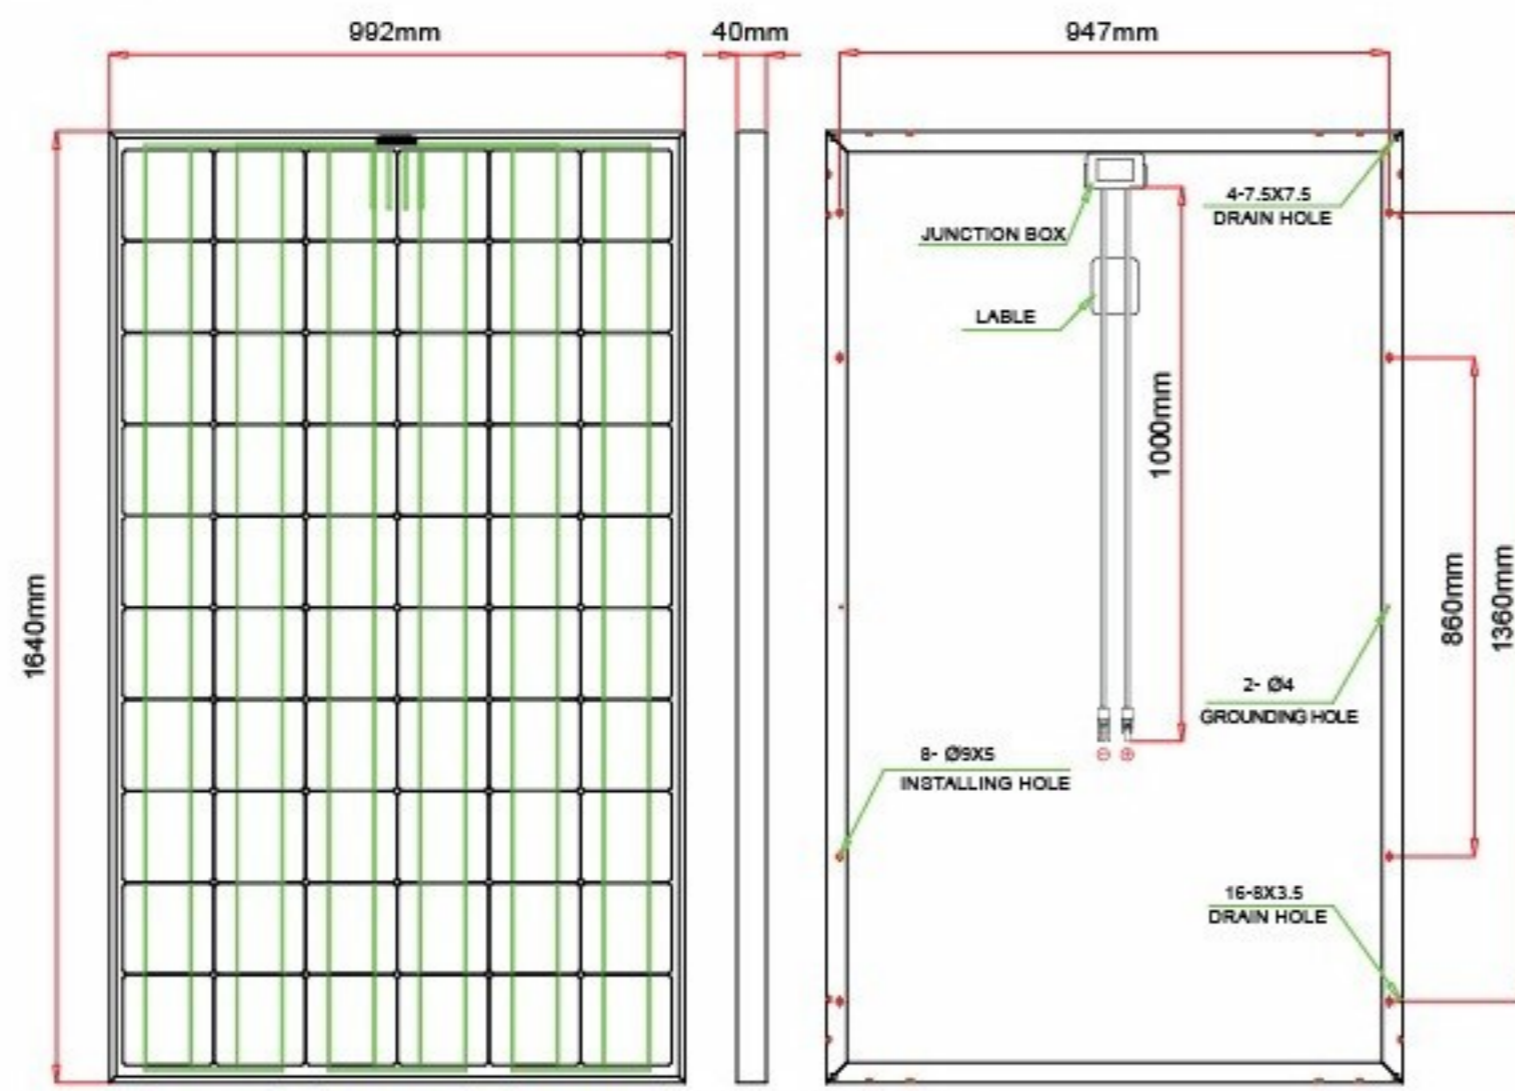

Drawing Only for Reference

I-V Curves

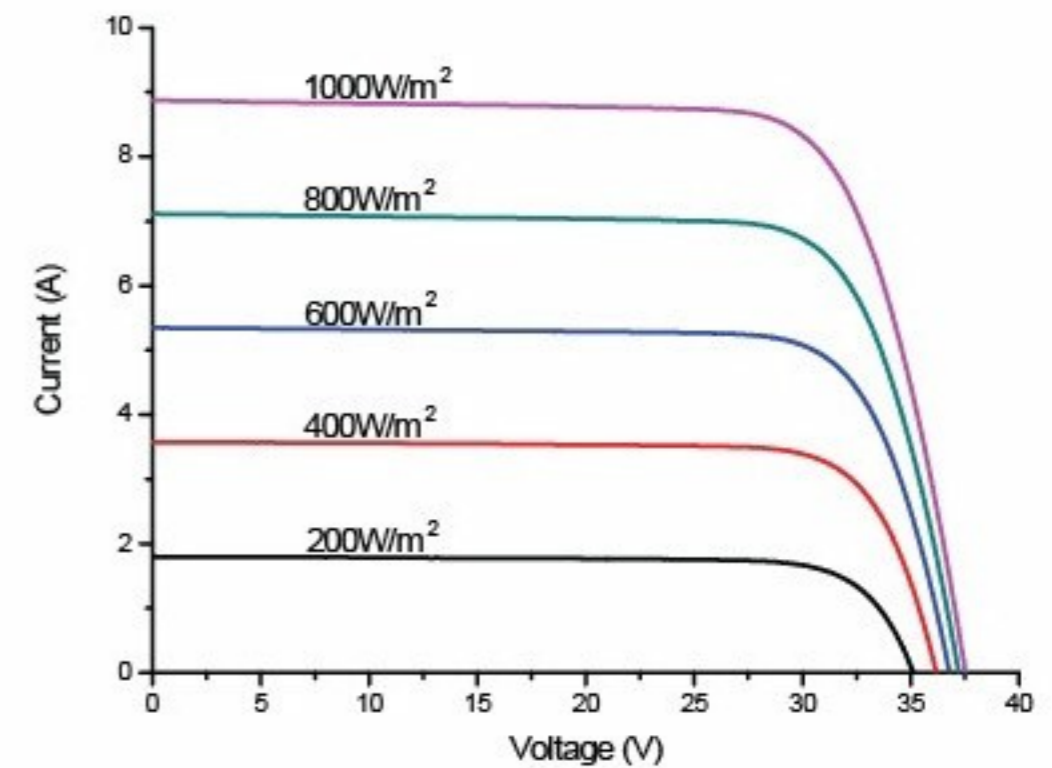

Efficiency at Varied Irradiation

Irradiance	200W/m ²	400W/m ²	600W/m ²	800W/m ²	1000W/m ²
Efficiency	15.3%	15.6%	15.6%	15.5%	15.4%

Electrical Characteristics STC

JC245S-24/Bb

JC250S-24/Bb

Maximum Power (Pmax)	245 W	250 W
Power Tolerance	0~+5W	0~+5W
Module Efficiency	15.1%	15.4%
Maximum Power Current (Imp)	8.19 A	8.32 A
Maximum Power Voltage (Vmp)	30.0 V	30.1 V
Short Circuit Current (Isc)	8.79 A	8.87 A
Open Circuit Voltage (Voc)	37.4 V	37.5 V

Values at Standard Test Conditions STC (Air Mass AM1.5, Irradiance 1000W/m², Cell Temperature 25°C)

Electrical Characteristics NOCT

JC245S-24/Bb

JC250S-24/Bb

Maximum Power (Pmax)	180 W	184 W
Maximum Power Current (Imp)	6.51 A	6.57 A
Maximum Power Voltage (Vmp)	27.7 V	28.0 V
Short Circuit Current (Isc)	7.08 A	7.15 A
Open Circuit Voltage (Voc)	35.0 V	35.1 V

Values at Normal Operating Cell Temperature, Irradiance of 800 W/m², spectrum AM 1.5, ambient temperature 20°C, wind speed 1 m/s

Mechanical Characteristics

Cell Type	156 x 156 mm Monocrystalline, 60 (6 x 10) pcs in series
Glass	High Transmission, Low Iron, Tempered Glass
Frame	Anodized Aluminum Alloy
Junction Box	IP65 rated, with bypass diodes
Dimension	*1640 x 992 x 40 mm
Cable Length	1000 mm
Weight	20 Kg
Installation Hole Location	See Drawing Above

Characteristics

Temperature Coefficient of Voc	-0.31%/°C
Temperature Coefficient of Isc	0.03%/°C
Temperature Coefficient of Pmax	-0.43%/°C
Nominal Operating Cell Temperature (NOCT)	45°C±2°C

Packing Information

Container	20'GP	40'GP	40'HQ
Pallets per Container	12	28	28
Pieces per Container	300	700	770

Maximum Ratings

Operating Temperature	-40 °C to +85 °C
Maximum System Voltage	1000 VDC (EU) / 600 VDC (US)
Maximum Series Fuse Rating	20A(EU)/ 15A(US)

156 Series Monocrystalline Solar Module

245W, 250W



High Module Conversion Efficiency



Easy Installation and Handling for Various Applications



Withstanding Mechanical Load up to 5400 Pa



Conform with PV Standards: IEC 61215:2005, IEC 61730:2004, UL 1703



ISO9001, OHSAS18001, ISO14001




We provide a 10 years material and workmanship guarantee for our modules. In addition, a 90%-power-output guarantee for 10 years and a 80%-power-output guarantee for 25 years of the modules life are provided .

10-year
material & workmanship

10-year
90% power output

25-year
80% power output



APPROVED PRODUCT

