


Legendary performing hot water systems

Solargain's ground mount systems can reduce your hot water heating bills by up to 90%*

Installing a Solargain hot water system reduces the average family's carbon footprint by up to four tonnes of CO2 per year – the equivalent environmental benefit of planting 200 trees or removing 1 standard car off the road.



Average home energy consumption

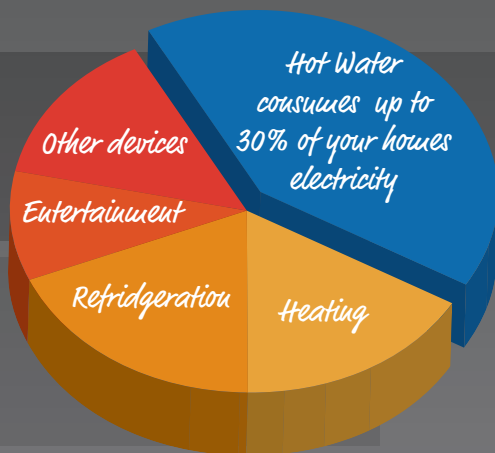

Conventional hot water systems account for up to 30% of the total energy use in the average Australian home. By switching to a Solargain hot water system, you can reduce your water heating bills by up to 90%*.



Latest technology with awesome benefits


- ✓ Designed to withstand harsh Australian climate
- ✓ All copper collector with black chrome selective coating maximises energy absorption
- ✓ Latest Solargain smart control technology constantly manages real-time water temperature
- ✓ Sleek and modern low profile design.
- ✓ Offset your carbon footprint & utilise Australia's vast sunshine

Our split system range attract the highest STC values on the market. Small-Scale Technology Certificates represent the amount of electricity displaced by a solar hot water system over the course of its lifetime up to 10 years.

Water tanks built for Australian conditions

Tough, robust & economical, Solargain's range of hot water tanks are technologically advanced for maximum efficiency.

Our custom designed tanks are available in 250L, 315L and 400L options, ensuring a perfectly sized system to meet every hot water demand.

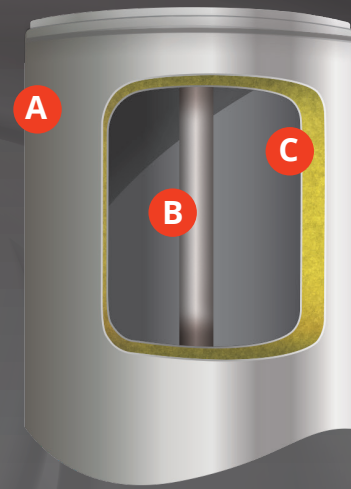

A. Storage Tank – manufactured in mild steel with internal glass lined enamel coating for maximum protection against high-tensile stress corrosion.

B. Sacrificial Anode – attracts corrosive elements so the tank itself does not corrode.

C. Polyurethane Insulation – Minimizes heat loss and maximises heat retention for superior efficiency.

| 250L Tank Dimensions | Household Users | Warranty |
|----------------------|-----------------|----------|
| 1388mm x 648mm | 1-3 | 5 Years |

| 315L Tank Dimensions | Household Users | Warranty |
|----------------------|-----------------|----------|
| 1682mm x 648mm | 3-6 | 5 Years |

| 400L Tank Dimensions | Household Users | Warranty |
|----------------------|-----------------|----------|
| 1731mm x 738mm | 6-8 | 5 Years |

| Panel Model | Length x Width | Depth | Weight | Area |
|-------------|-------------------|-------|--------|--------|
| CSG25 x 1 | 2000 mm x 1247 mm | 95 mm | 46 kG | 2.5 m2 |
| CSG20 x 2 | 2000 mm x 1000 mm | 95 mm | 37 kG | 2.2 m2 |

| Warranty Information | |
|----------------------|----------------------------|
| Tanks & Collectors | 5 yr parts and 5 yr labour |
| Gas Booster | 10 yr heat exchanger parts |
| | 3 yr parts and labour |

6 star energy efficient gas booster

| Gas Booster | 20L | 26L |
|------------------|-------------------|-------------------|
| Height | 520mm | 542mm |
| Width | 350mm | 350mm |
| Weight | 14kG | 17kG |
| Gas connection | 20 BSP | 20 BSP |
| Water connection | 15 BSP | 15 BSP |
| Ignition | Electronic | Electronic |
| Voltage | 240AC | 240AC |
| Gas Type | Natural Gas / LPG | Natural Gas / LPG |



6 STAR ENERGY RATING

